

CURVA CARACTERÍSTICA
Performance curves

L 25

3500


rpm

ROTOR: Ø _____ Ø _____ Ø Max. _____ CV máx. _____
Impeller: Máx. 130 mm Min. 75 mm Sólidos _____ mm $\frac{CV}{n}$

BOCAL DE SUÇÃO
Suction size Ø40(1 1/2")

BOCAL DE DESCARGA
Discharge size Ø25(1")

$\gamma = 1 \text{ kgf/dm}^3$ Visc: 1° E

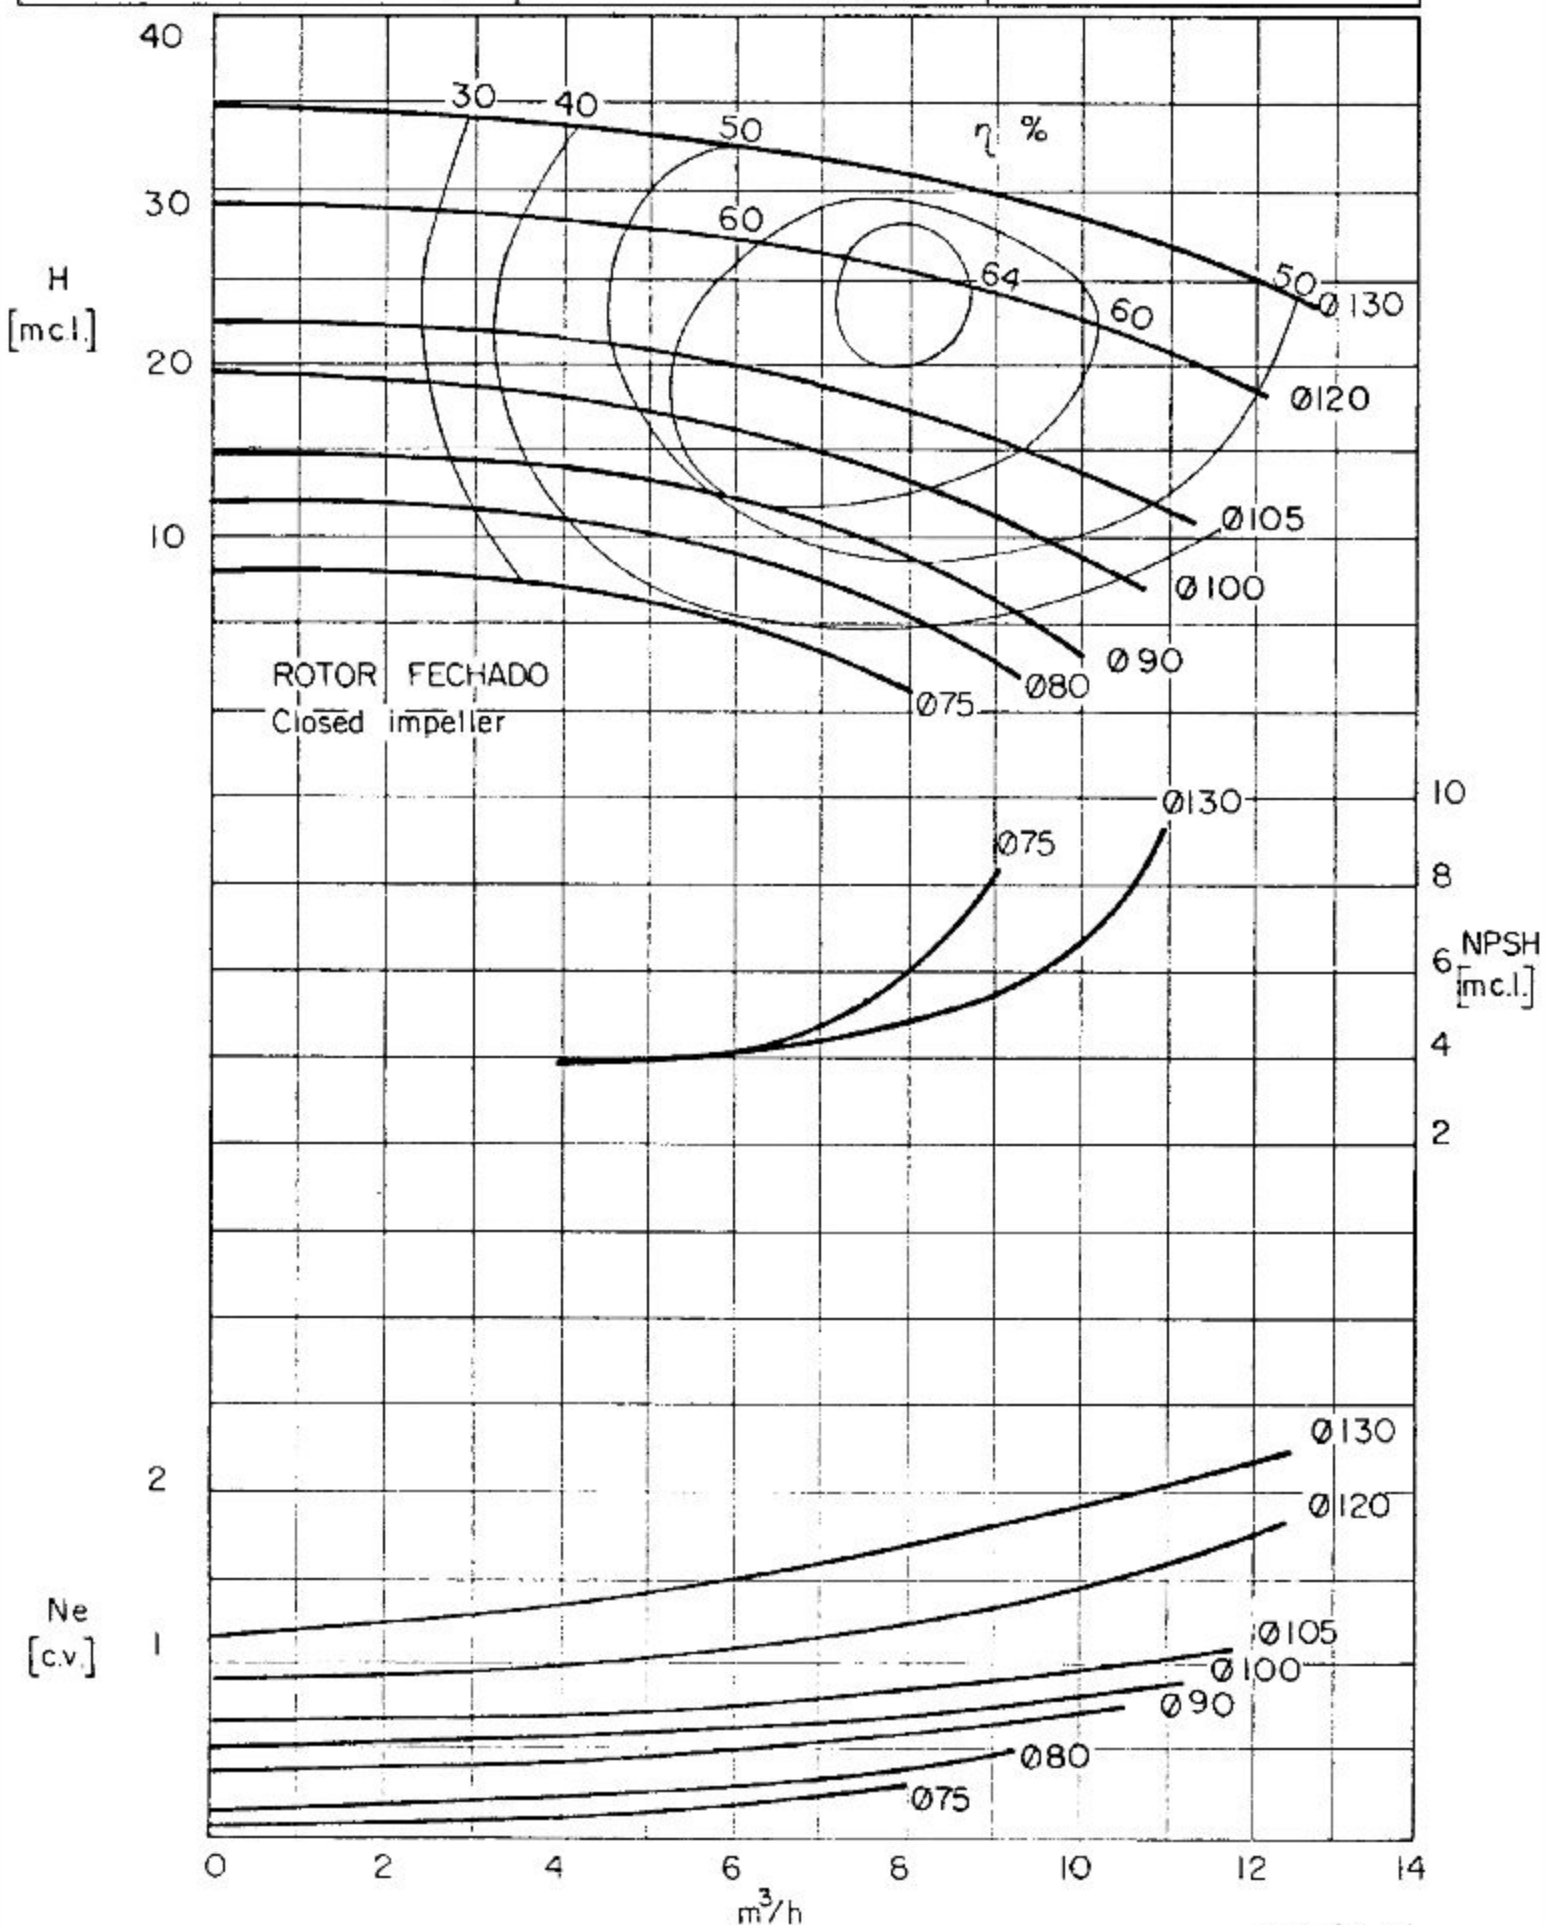

CURVA CARACTERÍSTICA

Performance curves

L 32

3500


rpm

ROTOR: Ø _____ Ø _____ Ø Máx. _____
 Impeller: Máx. 127 mm Min. _____ mm Sólidos _____ mm $\frac{CV \text{ máx.}}{n}$ _____

BOCAL DE SUÇÃO
 Suction size Ø50 (2")

BOCAL DE DESCARGA
 Discharge size Ø32 (1 1/4")

$\gamma = 1 \text{ kgf/dm}^3$ Visc 10 E

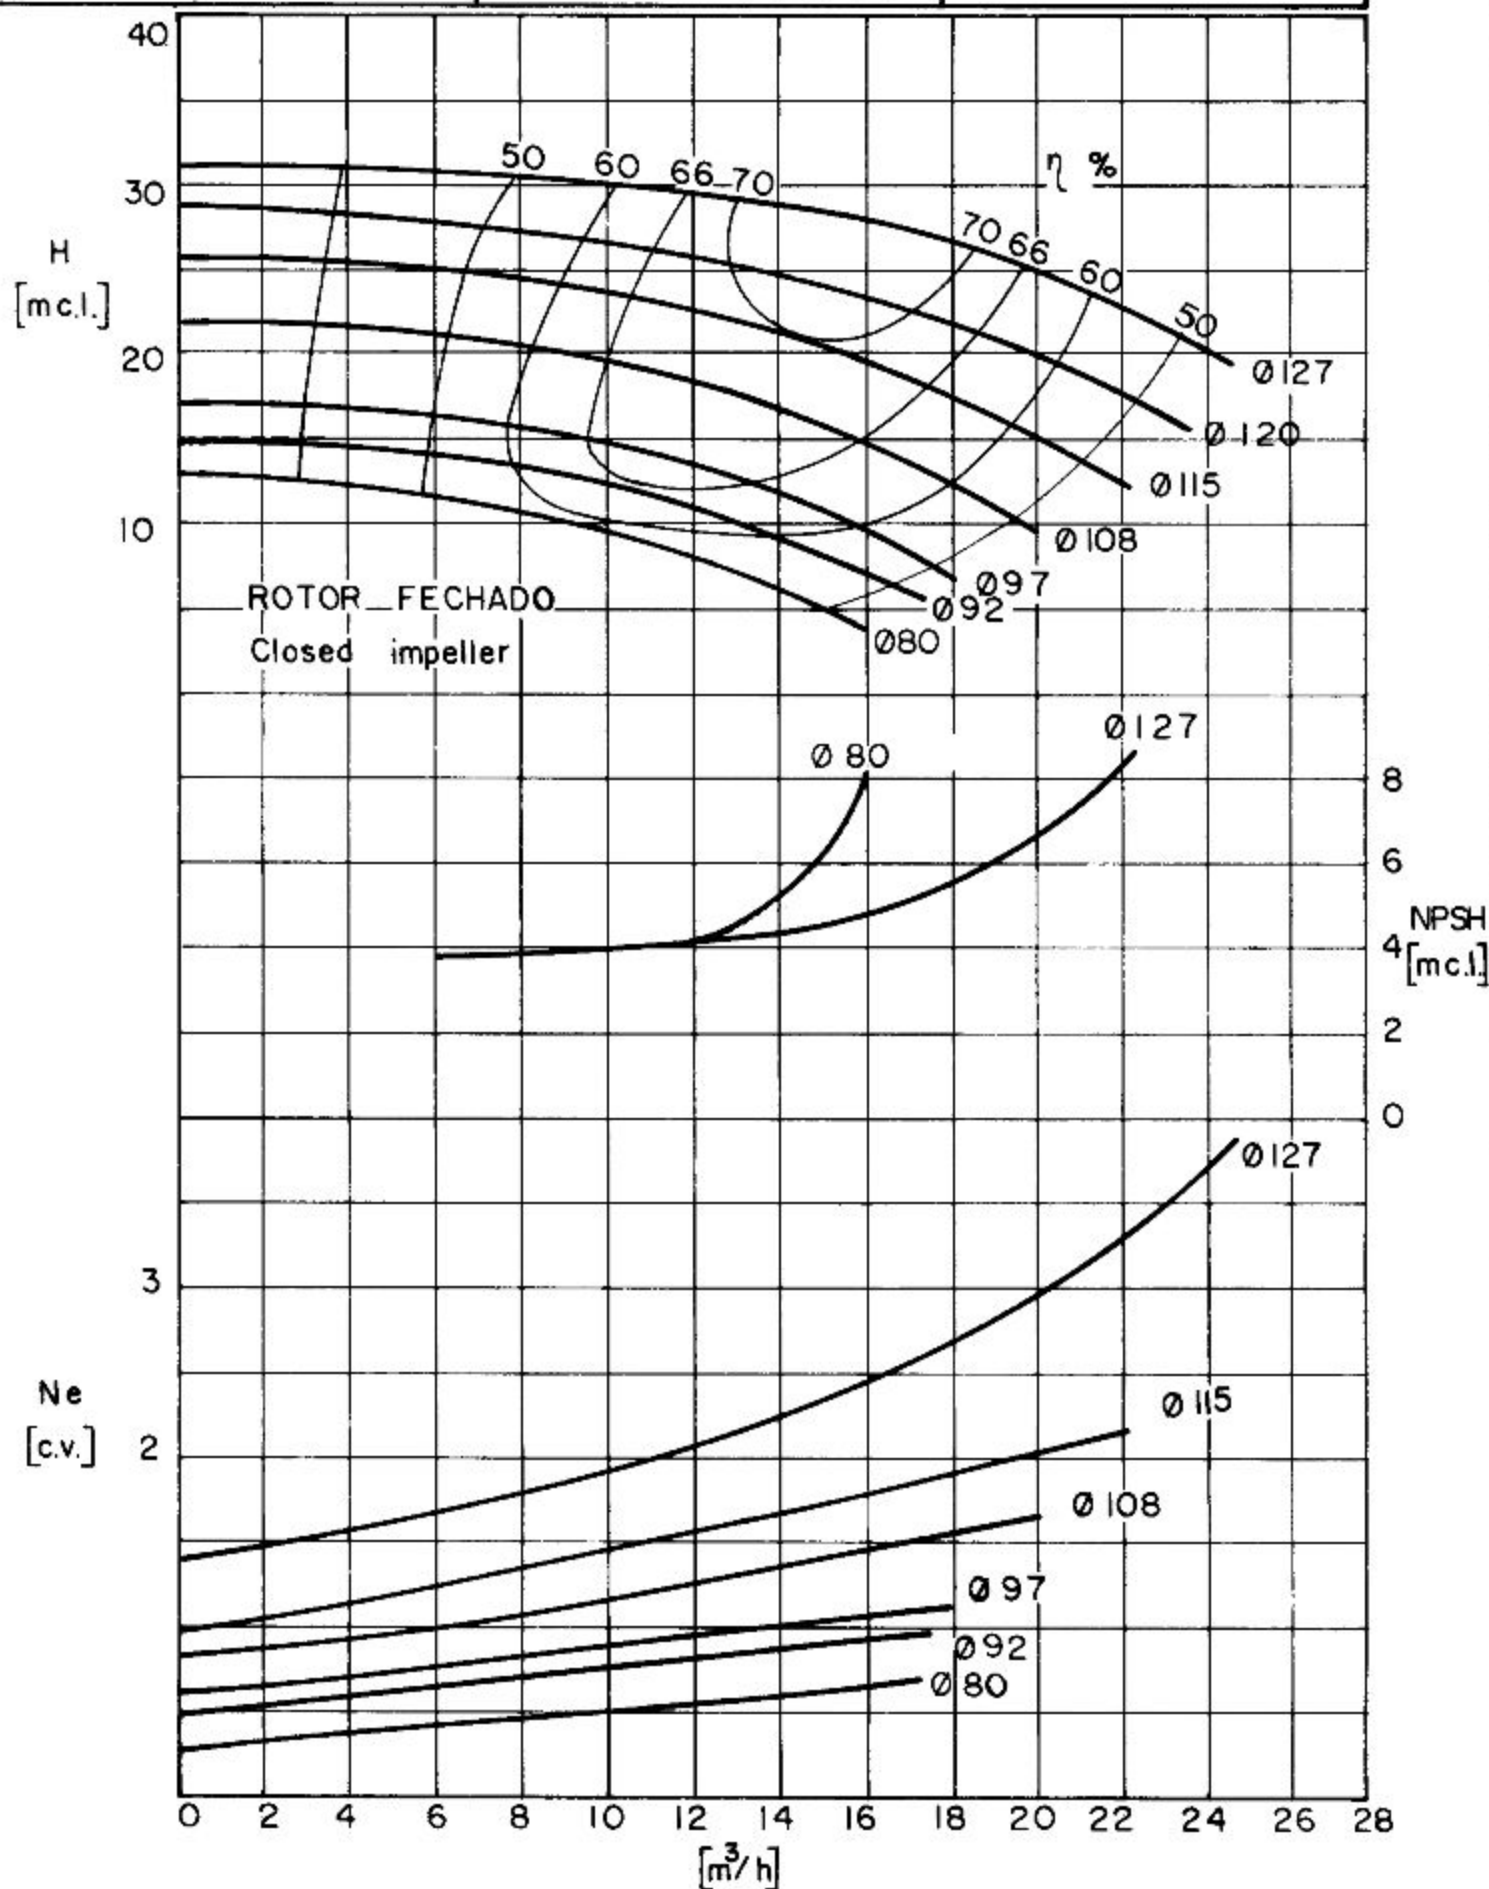

CURVA CARACTERÍSTICA
Performance curves

L 40

3500


rpm

ROTOR: \emptyset Impeller: Máx. 118 mm Min. 90 mm \emptyset Máx. Sólidos mm CV máx. n

BOCAL DE SUÇÃO
Suction size $\emptyset 65(2\frac{1}{2}'')$

BOCAL DE DESCARGA
Discharge size $\emptyset 40(1\frac{1}{2}'')$

$\gamma = 1 \text{ kgf/dm}^3$ Visc 1° E

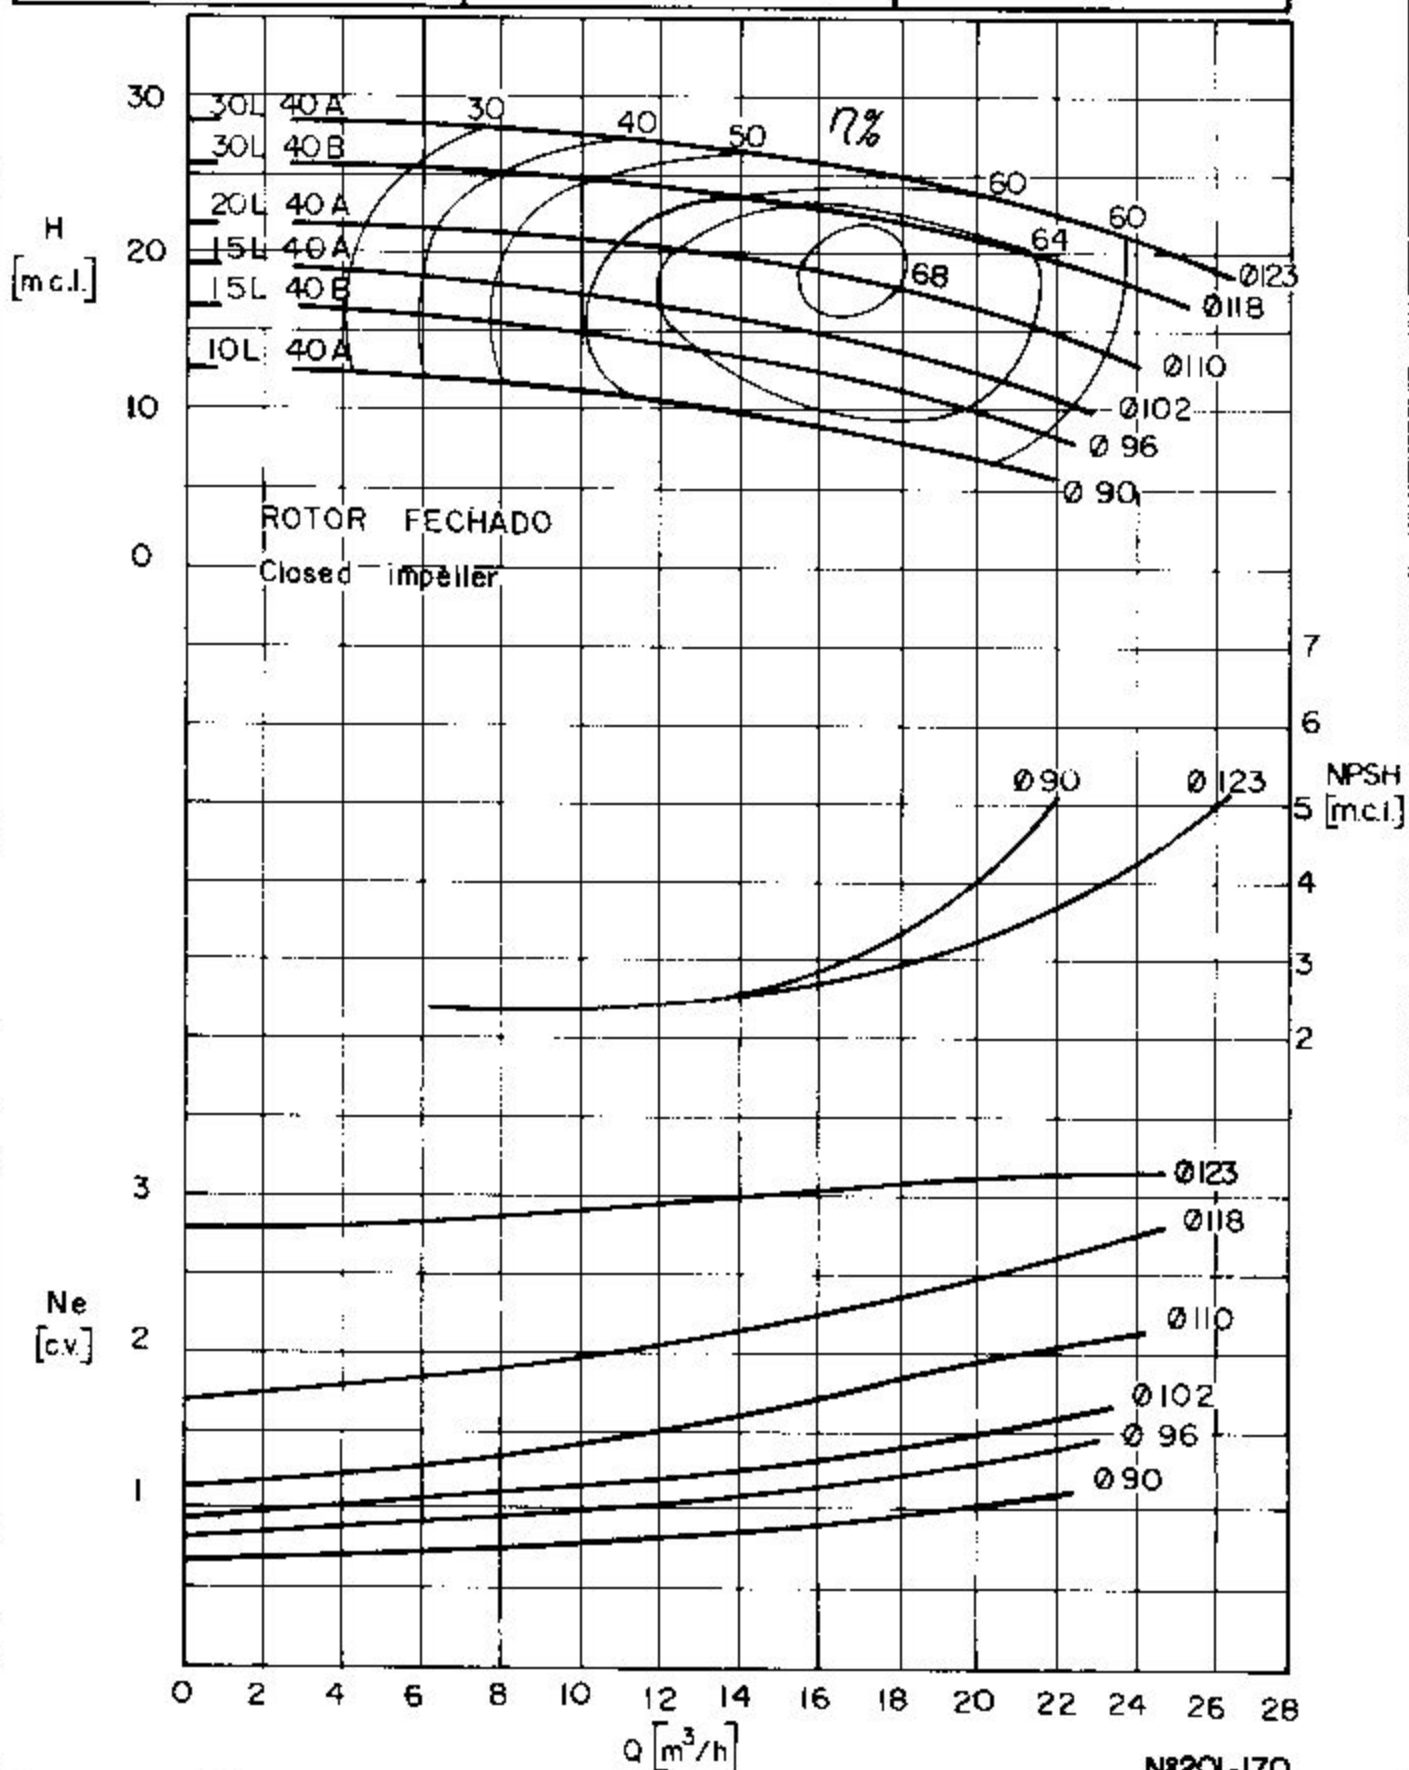

Nº 201-170